

SMALL GEAR REDUCER SERIES






www.vungphattech.com

A


■ 立式減速機

Vertical Type Reducer

■ MODEL : SV

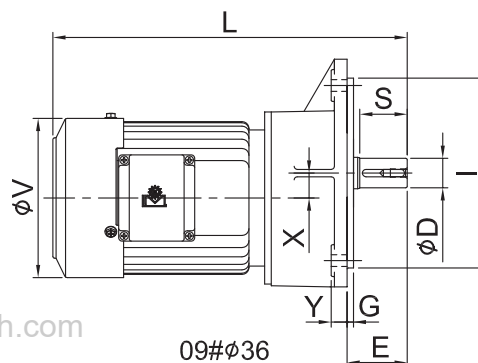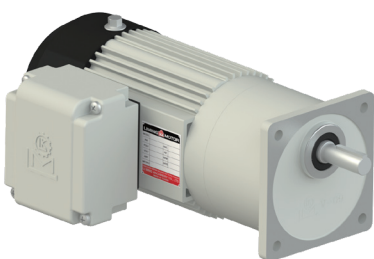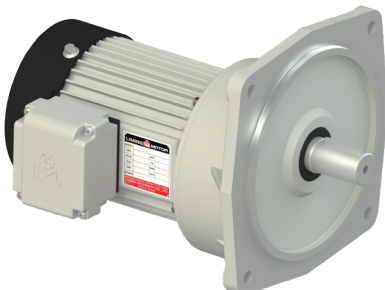


www.vungphattech.com



SV(B法蘭面)

型號Model:10,11,12,13,14



SV-A法蘭面

1. 型號Model:09,10,11

有凸托架(WITH CONVEX TRAILER)

2. 型號Model:10

無凸托架(WITHOUT CONVEX TRAILER)



VUNG PHAT TECH

unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	A	B	C	M	N	I	E	G	Y	X	L	V	出力軸 Output Shaft					重量 Weight (KG)
60W	SV-A09	1/3~1/120 (1/160~1/230)	92	92	104	101	7	-	40	4.5	10.5	18	270	98	D	S	W	T	U	4
90W	SV-A09	1/3~1/80 (1/90~1/230)	92	92	104	101	7	-	40	4.5	10.5	18	285	98	12	33	4	4	9.5	4
1/8HP (0.1kW)	SV-A10	1/3~1/50 (1/60~1/200)	122	122	140	108	9	-	33	-	10	17	280	123	18	30	5	5	15	5
	SV-B10		158	158	170	108	9	120	36	3	10	17	280	123	18	30	5	5	15	5
	SV-A11	1/6~1/200	145	145	170	108	11	-	47	4	12	17	305	123	22	40	7	7	18	7
	SV-11		174	174	185	108	11	140	49	4	12	17	305	123	22	40	7	7	18	7
1/4HP (0.2kW)	SV-A10	1/3~1/30 (1/40~1/155)	122	122	140	115	9	-	33	-	10	17	295	137	18	30	5	5	15	5
	SV-B10		158	158	170	115	9	120	36	3	10	17	295	137	18	30	5	5	15	8
	SV-A11	1/3~1/90 (1/95~1/155)	145	145	170	115	11	-	47	4	12	17	315	137	22	40	7	7	18	10
	SV-11		174	174	185	115	11	140	49	4	12	17	315	137	22	40	7	7	18	10
	12	1/35~1/200	217	217	235	115	11	180	57	6	15	23	330	137	28	45	7	7	24	11
1/2HP (0.4kW)	SV-A11	1/3~1/30 (1/35~1/120)	145	145	170	121	11	-	47	4	12	17	325	151	22	40	7	7	18	12
	SV-11		174	174	185	121	11	140	49	4	12	17	325	151	22	40	7	7	18	12
	12	1/3~1/90 (1/100~1/200)	217	217	235	121	11	180	57	6	15	23	340	151	28	45	7	7	24	13
	13	1/25~1/200	250	250	280	121	13	220	65	5	17	26	365	151	32	55	10	8	27	16
1HP (0.75kW)	12	1/3~1/30 (1/40~1/130)	217	217	235	128	11	180	57	6	15	23	360	163	28	45	7	7	24	16
	13	1/3~1/90 (1/100~1/165)	250	250	280	128	13	220	65	5	17	26	385	163	32	55	10	8	27	19
	14	1/35~1/180 (1/200)	260	276	310	128	18	230	77	5	20	28	430	163	40	65	10	8	35	44
2HP (1.5kW)	12	(1/2.5~1/60)	217	217	235	138	11	180	57	6	15	23	395	181	28	45	7	7	24	25
	13	1/3~1/25 (1/30~1/130)	250	250	280	138	13	220	65	5	17	26	425	181	32	55	10	8	27	28
	14	1/30~1/90 (1/100~1/170)	260	276	310	138	18	230	77	5	20	28	465	181	40	65	10	8	35	46
3HP (2.2kW)	13	(1/3~1/80)	250	250	280	138	13	220	65	5	17	26	465	181	32	55	10	8	27	28
	14	1/25~1/50 (1/60~1/170)	260	276	310	138	18	230	77	5	20	28	505	181	40	65	10	8	35	46

注:

- 表中 () 內數字系表示輕荷重使用。
- 表中重量以配合三相 4P 馬達為主，其它單相、剎車、直流、特殊等馬達重量另訂。
- 表中 L、LL 內數字以三相 (剎車) 馬達為主，其它特殊馬達另訂。
- 如需特殊馬達規格，請洽本司業務。
- 以上數值若有變更，恕不另行通知。

NOTE:

- Values shown in parenthesis () are used for light loading.
- Weights shown in the above chart are based on 3-phase 4P motors, weights for single phase, brake, DC, or special motor shall be referred to specific values.
- Values shown in "L" & "LL" column are based on 3-phase (brake) motor, other special motor refer to specific motor refer to specific values.
- For special motor specifications, please contact our business.
- Above specifications are subject to change without prior notice.



LIMING 5